JABIRU AIRCRAFT PTY LTD

P.O. Box 5792 Bundaberg West Queensland, Australia. Phone: +61 7 4155 1778 Fax: +61 7 4155 2669 Email: info@jabiru.net.au

SERVICE BULLETIN: JSB 030-2

Issue: 2

Date: 25th May 2011

Subject: J2XX LSA Category Weight Limitations – South Africa

Issue	Reason for Issue	Issue Status
1	Original Issue	SUPERSEDED
2	Alter wording to be generic to all J2XX series aircraft instead of specific to J230.	CURRENT

1	APPLICABILITY	1
2	BACKGROUND:	1
3	DETAILS	1
4	AIRWORTHINESS NOTE:	4

1 Applicability

• Jabiru J2XX (i.e. any member of the Jabiru J200-J299 aircraft family) aircraft operating in the Light Sport Aircraft category in South Africa. This Bulletin is equivalent to a Manufacturer's Safety Direction for these aircraft.

2 Background:

- The recently released South African CAA regulation 24.01.2.P.2 "Classification Parameters" introduces new requirements for the maximum payload of Light Sport Aircraft.
- The original configuration of the J2XX models does not comply with these regulations and so this bulletin has been prepared to allow alterations to be made to the aircraft to enable it to comply.

3 Details

 Remove the existing baggage, fuel calibration and fuel capacity decals from the aircraft and replace them as follows:

Table 1 - Decals

Details	Decal	
Baggage P/No. 5A123A0D	BAGGAGE COMPARTMENT 5KG MAXIMUM TOTAL	

Jabiru Service Bulletin: J2XX LSA Category Weight Limitations – South Africa		
JSB 030-2	25th May 2011	

Details	Decal	
Fit to right side fuselage wall immediately below window.		
Baggage P/No. 5A074A0D	BAGGAGE LOAD BEHIND SEATS ONLY DO NOT LOAD AFT OF THIS POINT REFER TO WEIGHT & BALANCE SECTION OF PILOT OPERATING HANDBOOK TO DETERMINE AIRCRAFT TRIM. Fit to inside of fuselage on right side just below rear quarter window. Locate vertical line in line with rear of baggage shelf.	
Baggage Zones P/No. 5A063A0D	BAGGAGE ZONE A BAGGAGE ZONE B AFT LIMIT FORWARD LIMIT FORWARD LIMIT AFT LIMIT AT AT MAIN BOTTOM OF REAR UNDERCARRIAGE. BULKHEAD. SEE FLIGHT MANUAL SECTION 6 FOR DETAILS	
	Fitted on inside of fuselage on RHS of cabin. Locate line 500mm aft of seat backs.	
Electric Fuel Gauge Quantities. P/No. 5A105A0D Where Equipped.	5A105A1D-1 20L 10L 30L 11/4 11/2 3/4 E FUEL INDICATOR VALUES FOR LEVEL AIRCRAFT ONLY.	
	Fit inside wing root immediately aft of windows through to electric fuel gauge senders. Fit inner decal to outer in accordance with Procedure AVDALSR040-1	
Fuel Grade- Wing Tanks P/No 5A124A0D	FUEL_ AVGAS 100LL 33 LITRE CAPACITY FARTLL ON BOST	
2 OFF	EARTH ON POST Attach to top skin of wing adjacent to Fuel Filler Cap.	

JSB 030-2 Page 2 of 4

Jabiru Service Bulletin: J2XX LSA Category Weight Limitations – South Africa		
JSB 030-2	25th May 2011	

- Remove the existing Pilot's Operating Handbook and replace it with the latest approved manual revision for the model.
- Fit fuel tank filler sleeve P/No. 2A124A0D to the fillers of both wing tanks. Fit the sleeve as detailed in drawing 4A547A0D (Figure 1 below).

4 Airworthiness Note:

- Any work carried out with reference to this Bulletin must be carried out by authorised personnel. For the aircraft detailed herein this may mean the owner, an RA-Aus Level 2 holder, a Licensed Aircraft Maintenance Engineer (LAME) or equivalent – as appropriate to the aircraft's registration and use.
- On completion of the work the authorised person must record details of the change in the aircraft's maintenance logbook. This note should include details of the work done, the date and the identity (including licence number where appropriate) of the person carrying out the work.

JSB 030-2 Page 3 of 4

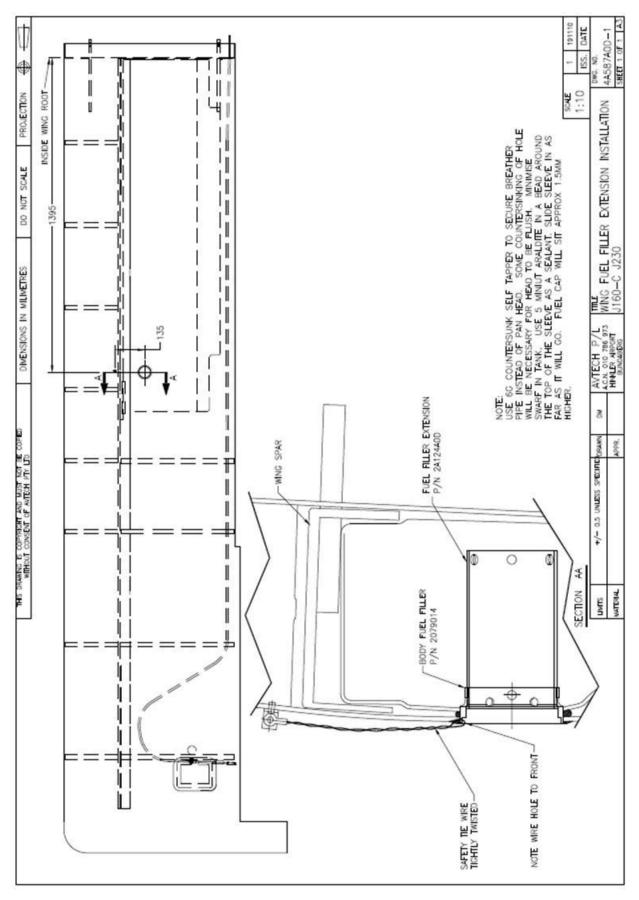


Figure 1 - Installation Drawing

JSB 030-2 Page 4 of 4